


SQUARE PATTERN

TRUNCATED DOME DETAIL




- NOTES:
1. THE MAXIMUM SLOPE OF THE SIDE FLARE FOR TYPE B RAMPS SHALL BE 1:10. HOWEVER, IF THE WIDTH OF THE LANDING AREA BETWEEN THE TOP OF THE RAMP AND AN OBSTRUCTION IS LESS THAN 4'-0" THEN THE MAXIMUM SLOPE SHALL BE 1:12.
 2. ALL SLOPE RATIOS ARE EXPRESSED AS UNITS OF VERTICAL DISPLACEMENT TO UNIT OF HORIZONTAL DISPLACEMENT (V:H).


DETECTABLE WARNING DETAIL

N.T.S.

* IF STANDARD 6" CURB IS USED:
SIDE FLARES WILL BE 5' IN WIDTH
AND RAMP WILL BE 6' IN DEPTH

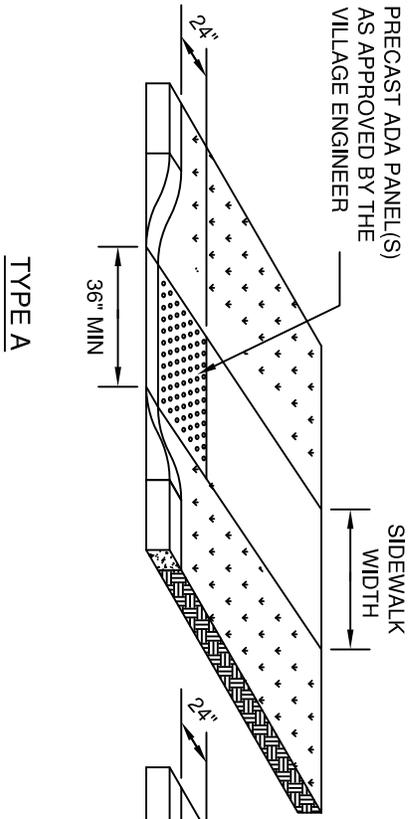

TYPE A

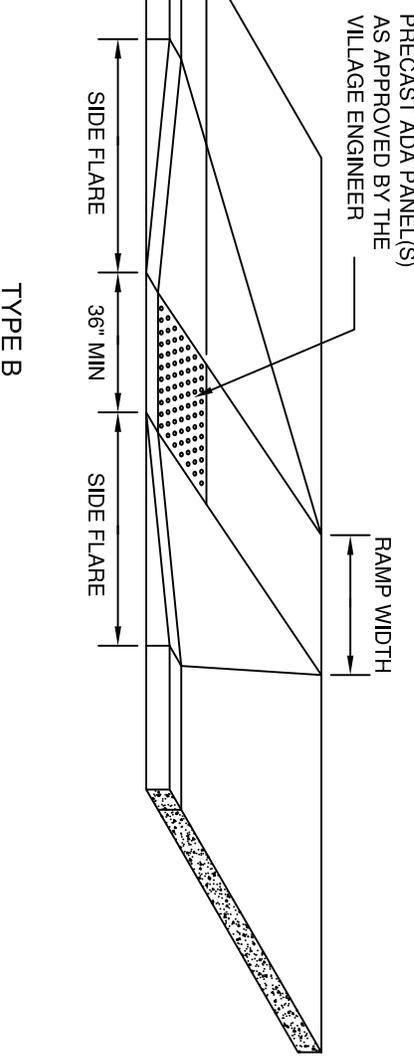

TYPE B

Village of Mount Prospect

Public Works Department
1700 W. Central Rd.

ADA RAMP DETAIL

Last Revised: 8-09